


Revolution 360 - High Efficiency EC Forward Curved EC Forward Curved - 146mm

Technical Data

| | |
|------------------------------|--------------|
| Supply (V/Ph/Hz) | 230 / 1 / 50 |
| Max Airflow (m³/h) | 337 |
| Max Current (A) | 0.8 |
| Max Input Power (W) | 85 |
| Max Speed (rpm) | 3000 |
| ErP Efficiency Rating (FMEG) | 56 |
| Ip Rating | 54 |
| Motor Insulation Class | B |
| Temperature Range (°C) | -20 to +60 |
| Weight (KG) | 1.11 |

Performance Data

| Data Point | Static Pressure (pa) | Airflow (m³/h) | Current (A) | Speed (rpm) | Power (W) |
|------------|----------------------|----------------|-------------|-------------|-----------|
| 1 | 527 | 148 | 0.62 | 3002 | 42 |
| 2 | 547 | 148 | 0.62 | 3008 | 62 |
| 3 | 476 | 194 | 0.72 | 2860 | 75 |
| 4 | 309 | 297 | 0.75 | 2439 | 78 |
| 5 | 0 | 337 | 0.79 | 2055 | 84 |

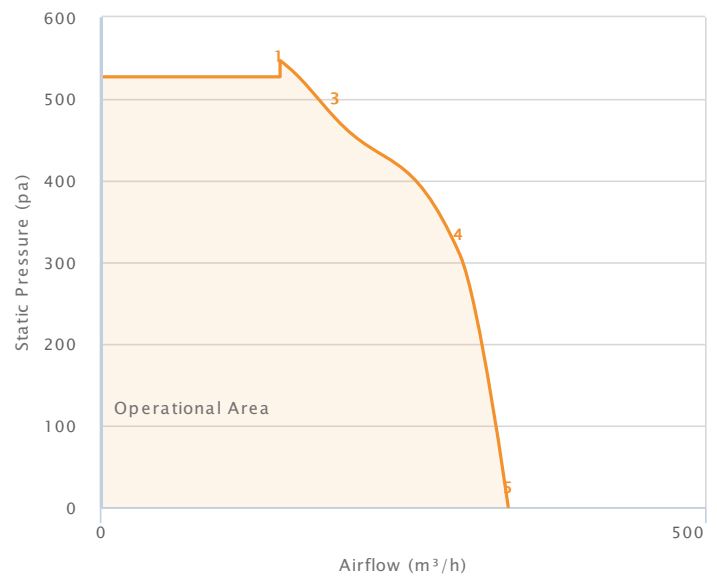

- Tested in accordance with ISO 5801
- Installation type method - type A

Dimensions

| | | | |
|---|------|---|----|
| A | 146 | G | 30 |
| B | 43.6 | H | |
| C | 57.5 | I | |
| D | 80.3 | J | |
| E | 80 | K | |
| F | 600 | L | |